




Daylight 5600K

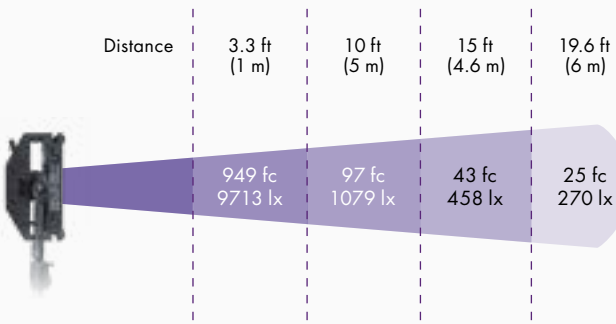


Tungsten 3200K

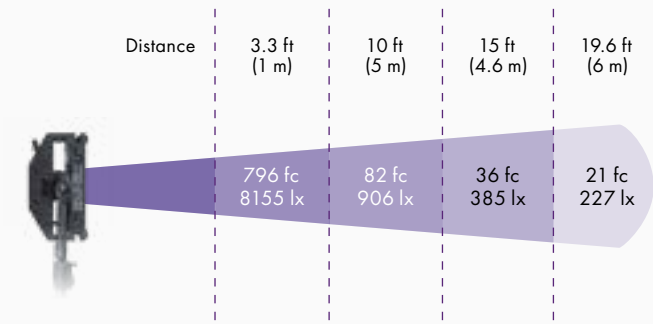


CRI 5600K

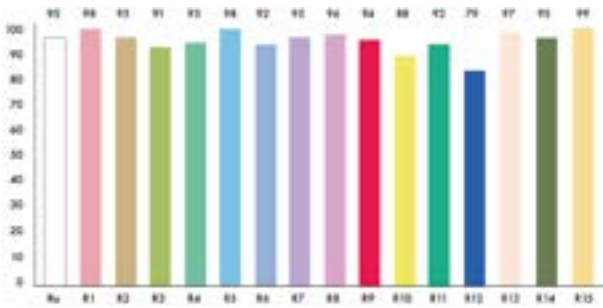


CRI 3200K

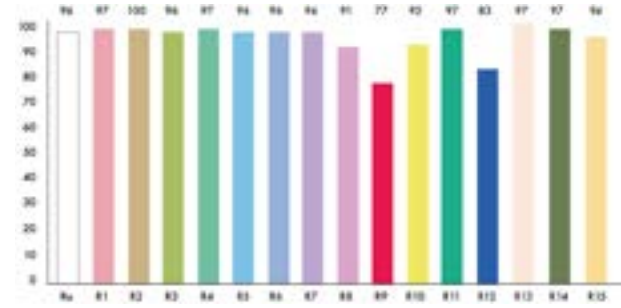


Spectrum

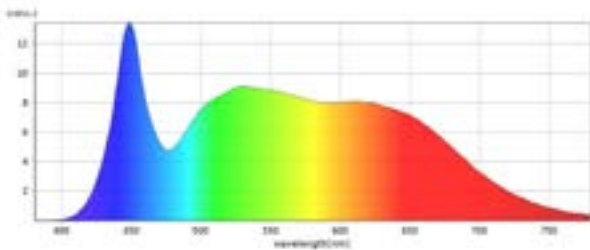


Spectrum

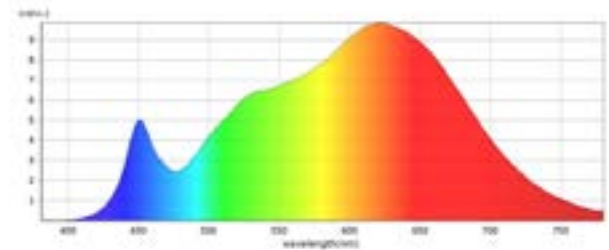

General Color Rendition

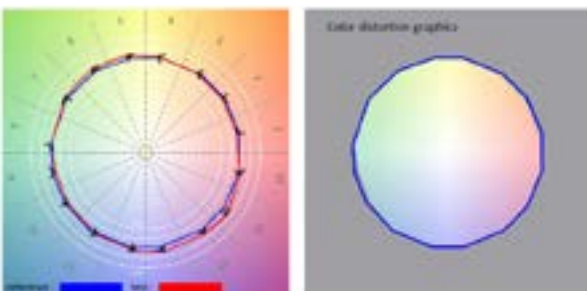

General Color Rendition

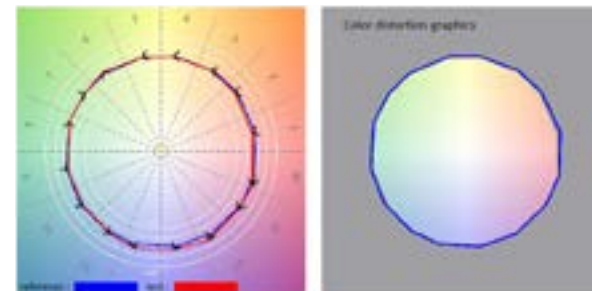

PART NUMBERS	EU	UK	US	Bare Ends
Standard Yoke	945-1101	945-1201	945-1301	945-1401
Pole Operated	945-1111	945-1211	945-1311	945-1411

Optical

- **LED Panel:** RGBWW
- **Beam angle:** 95°
- **CCT Range:** 2,700-10,000K
- **Daylight (5600K) (Lux @10ft/3m):** 614
- **Tungsten (3200K) (Lux @10ft/3m):** 557
- **RED (Lux @10ft/3m):** 74
- **GREEN (Lux @10ft/3m):** 177
- **BLUE (Lux @10ft/3m):** 34
- **CRI (average):** 97
- **TLCI (average):** 94
- **+/- Green-Magenta Adjustment:** Continuously Variable
- **Included Diffusion:** Fixed

Operational

- **Lighting Control Modes:** RGBWW/CCT/HSI/Gel/FX/XY
- **Number of Gels:** 300
- **Number of Effects:** 11
- **Dimming Control:** Constant Current 0-100% Continuous
- **Remote Control Options:** DMX, RDM, Apollo CRMX*, WDMX*, Bluetooth*
- **Fan Control:** Yes
- **USB Updates:** Yes
- **Ambient Temp Operation:** -20 to +45°C / -4 to +113°F
- **Estimated LED lifetime:** 50,000+ hrs
- **Preset Options:** 6x preset CCT modes with quick select buttons
6x customisable user presets with quick select buttons

* Requires optional dongle

Mechanical

- **Versions:** manual, pole operated
- **Weight*:** Manual: 12 lb / 5.5 kg
Pole Operated: 16 lb / 7.6 kg
- **Height:** 12.6" / 320 mm
- **Width:** 12.6" / 320 mm
- **Depth:** 4.3" / 110 mm
- **Mounting method:** TVMP

* Including yoke and power supply

Electrical

- **Nominal power draw:** 200W
- **Power supply:** Yoke Mounted
- **Mains Input:** IEC, 100-240 Vac / 50-60 Hz
- **IP Rating:** IP20
- **Mobile power options** [not included]:
 - Gemini 1x1 14.4V Battery Plate (fits to yoke or directly on fixture)
 - Dual Battery Bracket with XLR Cable

DIMENSIONS

